




Nitrile

## Extra long cuff for superior product and worker protection

- Elbow-length cuff (15.6 inches/395 mm) provides extra security against cross contamination
- Soft, durable nitrile material ensures excellent chemical splash protection with a comfortable feel
- Unique cuff design prevents roll-down
- Textured palm and fingers for confident, secure grip
- Packed in polybags for enhanced product protection

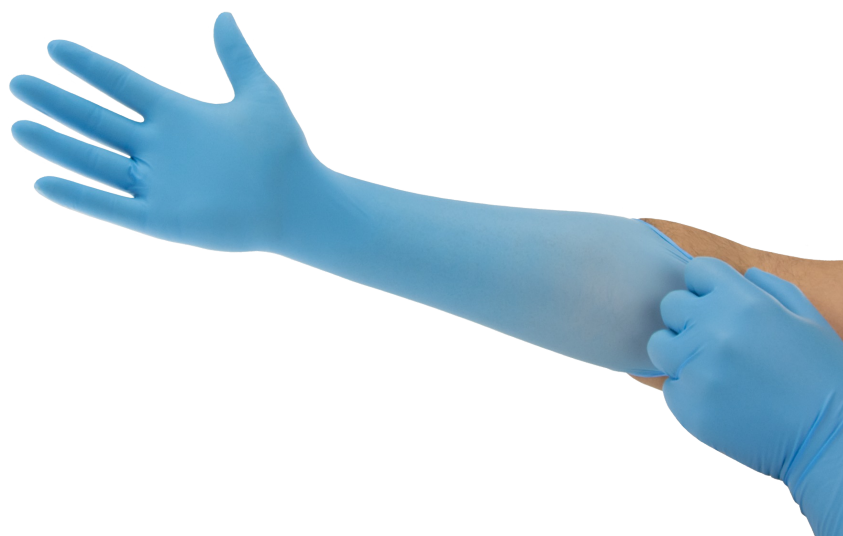

### Industries

- Healthcare

### Recommended For

- Enhanced tactile sensitivity and dexterity, especially for delicate procedures
- Protection from Type I latex allergy in HCW's or patients



## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

|  |  |
|--|--|
|  | <b>93-243</b>  |
| <b>Material</b>                          | Nitrile  |
| <b>Color</b>                             | Blue   |
| <b>Glove Design</b>                      | Chlorinated, Powder-Free, Fully Textured   |
| <b>Cuff</b>                              | Beaded   |
| <b>Manufacturing/QMS Audit Standards</b> | ISO 9001:2008  |
| <b>Regulatory/Standards Compliance</b>   | Category III, EN ISO 374-1:2016, EN 374:2003, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-5:2016, Food Type: Rubber, ISO 9001 |
| <b>Packaging</b>                         | 100 gloves per polybag<br>10 polybags per case<br>1000 gloves per case   |
| <b>Storage</b>                           | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition                          |
| <b>Country of Origin</b>                 | Malaysia   |
| <b>User Needs Segment</b>                | High Risk  |
| <b>Available sizes</b>                   | XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)  |

### PHYSICAL PROPERTIES

|   | Typical Values      |                    | Testing Method       |
|---|---------------------|--------------------|----------------------|
| Length (mm/inches)                      | 395 / 15.6          |                    | ASTM D3767, EN420    |
| Freedom from Holes (Inspection level I) | 1.5 AQL             |                    | ASTM D5151, EN 455-1 |
| Palm Thickness (mm/inches)              | 0.12 / 4.7          |                    | ASTM D3767, EN420    |
| Finger Thickness (mm/inches)            | 0.16 / 6.3          |                    | ASTM D3767, EN420    |
|   | <b>BEFORE AGING</b> | <b>AFTER AGING</b> |                      |
| Ultimate Tensile Strength (MPa)         | ≥14                 | ≥ 14               | ASTM D412            |
| Elongation at Break (%)                 | ≥ 500               | ≥ 400              | ASTM D412            |

For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
Riverside Business Park  
Blvd International, 55  
1070 Brussels, Belgium  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

#### Asia Pacific Region

Ansell Global Trading Center  
(Malaysia) Sdn Bhd  
Prima 6, Prima Avenue  
Block 3512, Jalan Teknokrat 6  
63000 Cyberjaya  
Selangor, Malaysia  
T: +603 8310 6688  
F: +603 8310 6699

#### North America Region

Ansell Healthcare Products LLC  
111 Wood Avenue South,  
Suite 210  
Iselin, NJ 08830, USA  
T: +1 800 800 0444  
F: +1 800 800 0445

#### Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.  
Blvd. Bernardo Quintana No. 7001-C,  
Q7001 Torre II,  
Suites 1304, 1305 y 1306,  
Col. Centro Sur, c.p. 76079  
Queretaro, Qro. Mexico  
T: +52 442 248 1544 / 248 3133

#### Australia

Ansell Limited  
Level 3, 678 Victoria Street,  
Richmond, Vic, 3121  
Australia  
T: +61 1800 337 041  
F: +61 1800 803 578

#### Russia

Ahcenn PYC  
123610 Poccnr, Mockba  
Kpachonpechehckar  
Ha6. 12, n.3, op. 1304A  
Ten. +7 495 258 13 16

### Performance Standards and Regulatory Compliance



Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2019 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.